


|< 800 mm >|



Washbasin, furniture washbasin asymmetric	Dimension	Weight	Order number
with overflow, with tap platform, underneath glazed, boleft side, 800 mm	owl on		
Colors			
00 White Alpin			
Variant			
•	800 x 480 mm	27.000 kilogram	2369800000
⊗	800 x 480 mm	27.000 kilogram	2369800060
Sanitary ceramics with the special WonderGliss surface time to come. When ordering WonderGliss please add a "1" as eleven	•	ttractive-looking for a lond	9
time to come. When ordering WonderGliss please add a "1" as eleven Accessory	•		,
time to come. When ordering WonderGliss please add a "1" as eleven Accessory Push-open waste for washbasins with overflow	•	0.400 kilogram	005052
time to come. When ordering WonderGliss please add a "1" as eleven	•		,
time to come. When ordering WonderGliss please add a "1" as eleven Accessory Push-open waste for washbasins with overflow	•	0.400 kilogram	005052
time to come. When ordering WonderGliss please add a "1" as eleven Accessory Push-open waste for washbasins with overflow Design Siphon	th digit to the model number.	0.400 kilogram 1.500 kilogram	005052 005036
time to come. When ordering WonderGliss please add a "1" as eleven Accessory Push-open waste for washbasins with overflow Design Siphon Siphon for washbasin with outlet pipe 300 mm	th digit to the model number. 1 1/4" mm	0.400 kilogram 1.500 kilogram	005052 005036

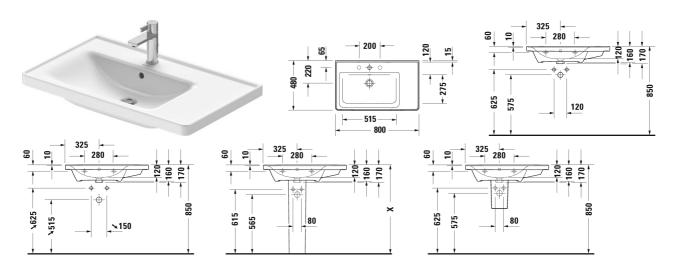

|< 800 mm >|

Vanity unit wall-mounted 1 pull-out compartment, Shelf element laterally, for D-Neo # 236980 bowl on left side, 784 x 452 mm 452 mm	DE4258
Vanity unit wall-mounted 1 pull-out compartment, for D-Neo # 236780, 236980, 237080, 784 x 455 mm	K25083
Vanity unit wall-mounted 2 drawers, upper drawer including cut-out for siphon and siphon cover, for D-Neo # 236980 bowl 784 x 455 mm on left side, 784 x 455 mm	K25285
Recommended faucets	
Single lever basin mixer M ceramic cartridge, Projection 113 mm, flexible connection hoses 3/8", aerator adjustable, normal spray, recommended operating pressure 1 - 5 bar, with pop-up waste set,	C11020001
Single lever basin mixer M ceramic cartridge, Projection 139 mm, flexible connection hoses 3/8", aerator adjustable, normal spray, chrome, maximum temperature can be adjusted on installation, recommended operating pressure 1 - 5 bar, with pop-up waste set,	B11020001
Single lever basin mixer M ceramic cartridge, Projection 139 mm, flexible connection hoses 3/8", aerator adjustable, normal spray, chrome, maximum temperature can be adjusted on installation, recommended operating pressure 1 - 5 bar, with pop-up waste set,	B21020001
Single lever basin mixer for concealed installation normal spray, ceramic cartridge, aerator adjustable, connection type: basic set for concealed installation, includes: visible parts, recommended operating pressure 1 - 5 bar, Projection 174 mm,	C11070003
Single lever basin mixer M ceramic cartridge, Projection 139 mm, flexible connection hoses 3/8", aerator adjustable, normal spray, chrome, maximum temperature can be adjusted on installation, recommended operating pressure 1 - 5 bar, without pop-up waste set,	B11020002
Single lever basin mixer for concealed installation normal spray, ceramic cartridge, aerator adjustable, connection type: basic set for concealed installation, includes: visible parts, recommended operating pressure 1 - 5 bar, Projection 225 mm,	C11070004
Single lever basin mixer M ceramic cartridge, Projection 139 mm, flexible connection hoses 3/8", aerator adjustable, normal spray, chrome, maximum temperature can be adjusted on installation, recommended operating pressure 1 - 5 bar, without pop-up waste set,	B21020002
Single lever basin mixer M ceramic cartridge, projection 107 mm, flexible connection hoses 3/8", normal spray, chrome, maximum temperature can be adjusted on installation, recommended operating pressure 1 - 5 bar, with pop-up waste set,	A11020001
Single lever basin mixer M ceramic cartridge, projection 107 mm, flexible connection hoses 3/8", normal spray, chrome, maximum temperature can be adjusted on installation, recommended operating pressure 1 - 5 bar, without pop-up waste set,	A11020002



|< 800 mm >|

Single lever basin mixer M ceramic cartridge, Projection 109 mm, flexible connection hoses 3/8", aerator adjustable, normal spray, chrome, maximum temperature can be adjusted on installation, recommended operating pressure 1 - 5 bar, with pop-up waste set,	DE1020001
Single lever basin mixer M ceramic cartridge, Projection 109 mm, flexible connection hoses 3/8", aerator adjustable, normal spray, chrome, maximum temperature can be adjusted on installation, recommended operating pressure 1 - 5 bar, without pop-up waste set,	DE1020002
Single lever basin mixer M FreshStart ceramic cartridge, in centre position cold water, Projection 109 mm, flexible connection hoses 3/8", aerator adjustable, normal spray, chrome, maximum temperature can be adjusted on installation, recommended operating pressure 1 - 5 bar, with pop-up waste set,	DE1021001
Single lever basin mixer M FreshStart ceramic cartridge, in centre position cold water, Projection 109 mm, flexible connection hoses 3/8", aerator adjustable, normal spray, chrome, maximum temperature can be adjusted on installation, recommended operating pressure 1 - 5 bar, without pop-up waste set,	DE1021002
Single lever basin mixer M ceramic cartridge, projection 116 mm, aerator with Easy-clean sprayplate, normal spray, connection size DN15, recommended operating pressure 1 - 5 bar, without pop-up waste set,	CE1020002
Single lever basin mixer M ceramic cartridge, projection 116 mm, aerator with Easy-clean sprayplate, normal spray, connection size DN15, recommended operating pressure 1 - 5 bar, with pop-up waste set,	CE1020001
Single lever basin mixer for concealed installation normal spray, ceramic cartridge, aerator with Easy-clean sprayplate, connection type: basic set for concealed installation, recommended operating pressure 1 - 5 bar, Projection 200 mm,	CE1070004
Single lever basin mixer M ceramic cartridge, projection 122 mm, aerator with Easy-clean sprayplate, flow rate 5,0 l/min (3 bar), normal spray, connection size DN15, recommended operating pressure 1 - 5 bar, with pop-up waste set,	WA1020001
Single lever basin mixer M ceramic cartridge, projection 122 mm, aerator with Easy-clean sprayplate, flow rate 5,0 l/min (3 bar), normal spray, connection size DN15, recommended operating pressure 1 - 5 bar, without pop-up waste set,	WA1020002
Single lever basin mixer for concealed installation normal spray, ceramic cartridge, aerator with Easy-clean sprayplate, flow rate 5,0 l/min (3 bar), connection type: basic set for concealed installation, includes: visible parts, recommended operating pressure 1 - 5 bar, projection 202 mm,	WA1070004
Single lever basin mixer M ceramic cartridge, projection 129 mm, aerator with Easy-clean sprayplate, flow rate 5,0 l/min (3 bar), normal spray, recommended operating pressure 1 - 5 bar, with pop-up waste set,	MH1020001
Single lever basin mixer M ceramic cartridge, projection 129 mm, aerator with Easy-clean sprayplate, flow rate 5,0 l/min (3 bar), normal spray, recommended operating pressure 1 - 5 bar, without pop-up waste set,	MH1020002



|< 800 mm >|

Single lever basin mixer for concealed installation normal spray, ceramic cartridge, aerator with Easy-clean sprayplate, flow rate 5,0 l/min (3 bar), connection type: basic set for concealed installation, recommended operating pressure 1 - 5 bar,	MH1070004
Single lever basin mixer M FreshStart connection size DN15,	WA1021001
Single lever basin mixer M FreshStart connection size DN15,	WA1021002
Single lever basin mixer M MinusFlow connection size DN15,	WA1022001
Single lever basin mixer M MinusFlow connection size DN15,	WA1022002

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.